


## Technical Data Sheet: TDS 5

### DIF 600 RTU – SULPHUR DIOXIDE

This tube is designed for passively monitoring gaseous airborne Sulfur dioxide.

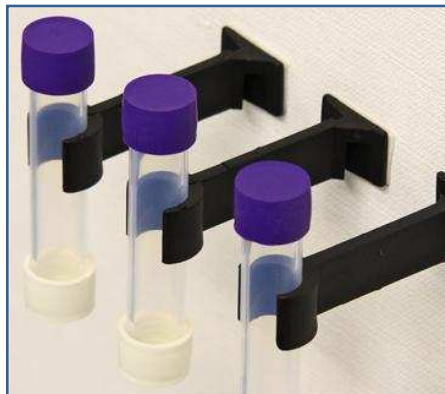

**Description:** Fluorinated ethylene polymer tube fitted with purple and white thermoplastic rubber caps. The colored cap contains the absorbent. A one-micron porosity filter is fitted to prevent the ingress of particulates loaded with sulfur i.e. diesel fumes.

The concentrations of sulfate ions chemically adsorbed are quantitatively determined by Ion Chromatography with reference to a calibration curve derived from the analysis of standard sulfate solutions (U.K.A.S. Accredited Methods).

Suitable for carrying out spatial or localized assessments for SO<sub>2</sub> in ambient air, workplace or industrial monitoring.

**Tube Dimensions:** 71.0mm length x 11.0mm internal diameter.

**Recommended Exposure Periods:** 2 – 4 weeks.

**Air Velocity:** Tube fitted with filter therefore negligible influence.

**Storage:** Store in a dark, cool environment preferably between 5-10 degrees centigrade.

**Shelf life:** 12 weeks from preparation date.

**Desorption Efficiency:**  $d = 0.99$  (determined using N.I.S.T. Standard Analytes).

**Limit of detection:** Less than 2  $\mu\text{g m}^{-3}$  over a 4-week exposure period. Specific values available upon request.

**Analytical Expanded Measurement Uncertainty:** available upon request.

**Working Range:** 4 – 200  $\mu\text{g m}^{-3}$ .

**Relevant Standards:** BS EN 13528 Parts 1-3: 2002/3.

**Special Factors:** Potential interference from aerosol particles containing high levels of sulfur.